



**CTEK
LITHIUM US**

12V/4.3A



**COMPLETE
BATTERY
CARE**

EFFECTIVE LiFePO_4 BATTERY CHARGING AND MAINTENANCE

CTEK LITHIUM US

The LITHIUM US is an advanced microprocessor controlled charger specially designed to recharge and maintain Lithium-Ion Phosphate (LiFePO_4) batteries – maximizing their performance and lifespan. With up to 4.3A of charge current available the LITHIUM US is extremely flexible and will charge LiFePO_4 batteries from 5Ah to 60Ah and maintain up to 120Ah.

Operation is simple and charging will commence upon connection. With no need to disconnect the battery from the vehicle, at charge start the LITHIUM US will automatically reset any low voltage protection electronics (Battery Management System) fitted. Charging can be restarted manually at any time using the “Reset” button.

The LITHIUM US is a fully automatic “connect and forget” charger with 8 charging steps including a testing sequence to show if the LiFePO_4 battery can take and retain charge, a unique maximisation step to restore full capacity, and patented maintenance charging to ensure maximum performance even after months of inactivity. Splash proof and dust proof (IP65) the LITHIUM US is easy and safe to use, protects vehicle electronics, spark-free, reverse polarity protected and short circuit proof. The LITHIUM US features a 5-year warranty.

3

Step 3 - Battery ready to use

7

Step 7 - Fully charged battery

8

Step 8 - Maintenance charging

AUTO

Fully automatic for optimal charging

12V

For Lithium-Ion Phosphate LiFePO_4 batteries

**5
YEAR
WARRANTY**

TECHNICAL DATA


INPUT VOLTAGE	100-115 VAC
CHARGE VOLTAGE	13.8/14.4 V
CHARGE CURRENT	Max 4.3 A
TYPE OF CHARGER	8-step, fully automatic charging cycle
TYPE OF BATTERY	12 V Lithium Ion Phosphate (LiFePO_4)
BATTERY CAPACITY	5.0 Ah-60 Ah, maintenance charging up to 120 Ah
PROTECTION RATING	IP 65 (splash and dust proof)
ARTICLE NO	56-926



THE SMARTEST BATTERY CHARGERS IN THE WORLD



UNIQUE 8 STEP CHARGING FROM CTEK

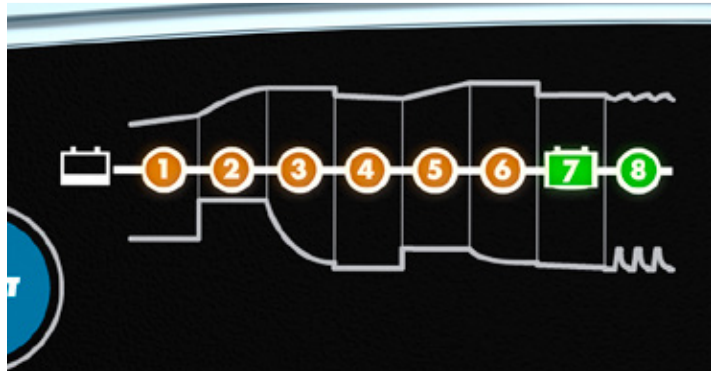

1 STEP 1 ACCEPT

Tests if the battery can accept charge. This step prevents charging from proceeding on a defective battery.

2 STEP 2 BULK

Charging with maximum current until approximately 90% battery capacity.

3 STEP 3 ABSORPTION

Charging with declining current to maximize up to 95% battery capacity.

4 STEP ANALYSE

Tests if the battery can hold charge. Batteries that can not hold charge may need to be replaced.

5 STEP COMPLETION

Final charge with reduced current up to approximately 98% battery capacity.

6 STEP 6 MAXIMIZATION

Final charge with maximum voltage up to 100% battery capacity.

7 STEP 7 FLOAT

Maintaining the battery voltage at maximum level by providing a constant voltage charge.

8 STEP PULSE


Maintaining the battery at 95-100% capacity. The charger monitors the battery voltage and gives a pulse when necessary to keep the battery fully charged.

GUARANTEED QUALITY WITH CTEK

CTEK customer support is available to answer any questions related to charging and CTEK chargers. Safety, simplicity and flexibility characterizes all products and solutions developed and sold by CTEK. CTEK supply chargers to more than 60 countries throughout the world. CTEK is also a reliable OEM supplier to many of the world's most prestigious car and motorcycle manufacturers.

Contact customer support: info@ctek.com

CTEK POWER, INC.
2374 EDISON BLVD. TWINSBURG, OH 44087-2376, UNITED STATES

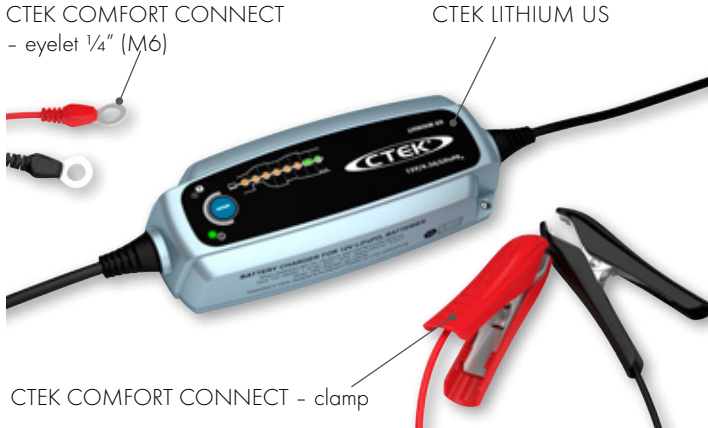

Complete LiFePO₄ battery care – unique and patented system to recover, charge and maintain LiFePO₄ batteries to maximize performance and extend life.


Safe to use – user safety through spark free operation and reverse polarity protection. Vehicle electrical safety through exceptionally clean voltage and current delivery with no surges or spikes. No need to disconnect battery from the vehicle when charging.

Connect and forget – simple plug and play operation. Manual Reset available.

Unique 8 step charging – the patented 8 step program tests battery condition and, charges and maintains to ensure maximum LiFePO₄ battery life and performance. FLOAT/PULSE maintenance ensures ideal battery care during periods of inactivity.

Extends battery life – the unique features of CTEK chargers combine to maximize performance and extend LiFePO₄ battery life.

CONNECT AND FORGET

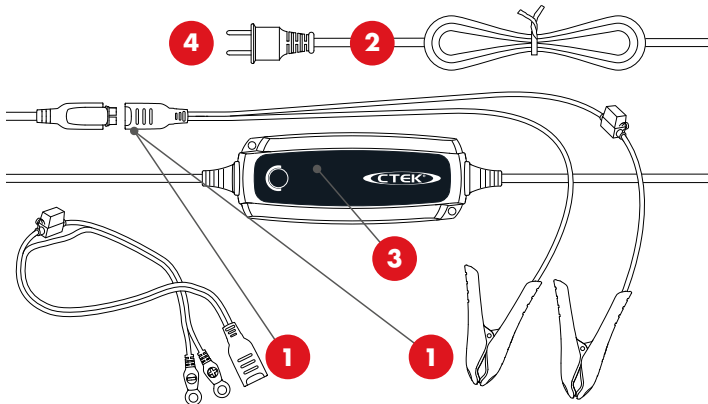

1. Connect the charger to the battery.
2. Connect the power cord to the power outlet. The power-on lamp is lit.
3. Charging starts.
4. Stop charging at any time by disconnecting the mains cable from the wall socket.